

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

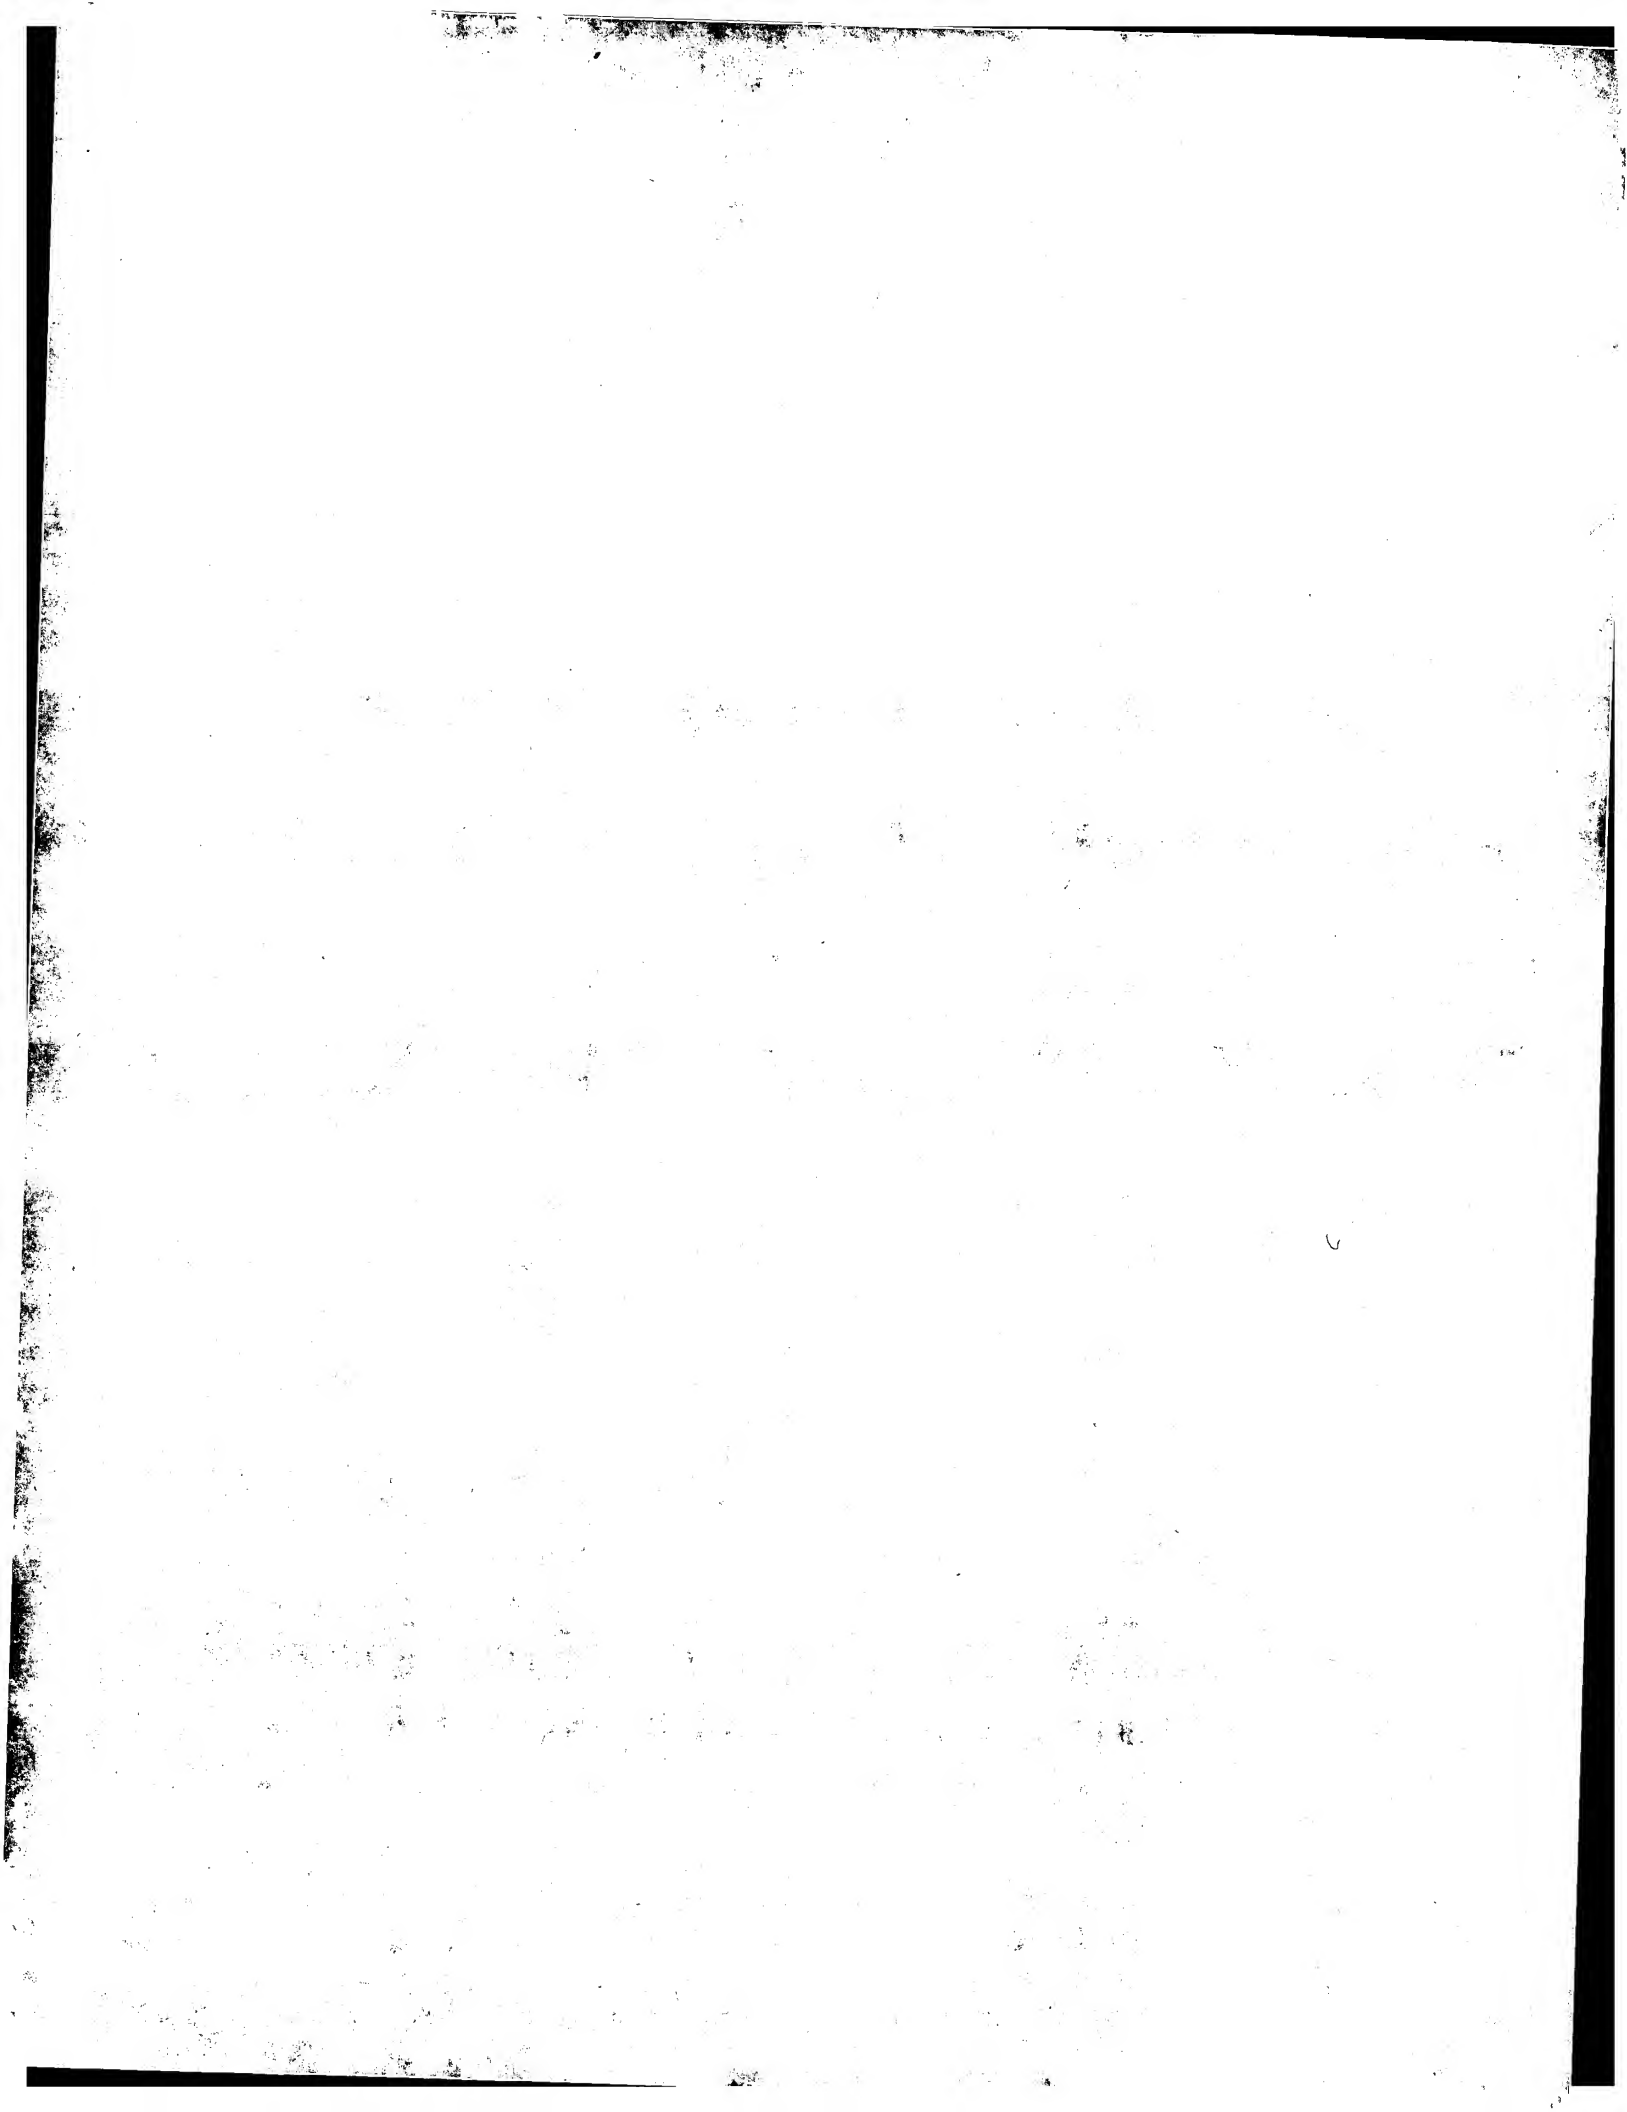



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Peter James POOL et al.

Appl. No. 10/734,597

Confirmation No. 1464

Filed: December 15, 2003

For: SOLID STATE IMAGER
ARRANGEMENTS

Art Unit: 2612

Examiner: Not yet assigned

Atty. Docket No. 41557-199752

Customer No.

26694

PATENT TRADEMARK OFFICE

Submission of Certified Copy of Priority Document

Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

Sir:

Submitted herewith is a certified copy of Application No. 0101301.0 filed on
January 18, 2001 in Great Britain the priority of which is claimed in the present application under
the provisions of 35 U.S.C. 119.

Respectfully submitted,

Date: 4/21/04

Robert Kinberg
Registration No. 26,924
VENABLE LLP
P.O. Box 34385
Washington, D.C. 20043-9998

Telephone: (202) 344-4000
Telefax: (202) 344-8300



THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears a correction, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated

13 January 2004

THIS PAGE BLANK (USPTO)

Patents Form 1/77

Patents Act 1977
(Rule 16)



The
Patent
Office

18JAN01 E599118-1 D00314
P01/7700 0.00-0101301.0

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference P/62007/VISD
2. Patent application number
(The Patent Office will fill in this part) 0101301.0 18 JAN 2001
3. Full name, address and postcode of the or of each applicant (underline all surnames)
MARCONI APPLIED TECHNOLOGIES LIMITED
ONE BRUTON STREET
LONDON
W1J 6AQ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation UNITED KINGDOM 78085/3002
4. Title of the invention SOLID STATE IMAGER ARRANGEMENTS
5. Name of your agent (if you have one) GILLIAN COCKAYNE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
REDDIETT GROSS
16, THEOBALDS ROAD
LONDON
WC1X 8PL

Patents ADP number (if you know it) 1009133003
078873300001
ESSEX CM2 7DS

MARRABLE House,
THE UNSEYARDS,
GROAT BADDOW,
CHELMSFORD
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer Yes if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body
See note (d)) YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

11

✓ only 10 received page 9 missing

Claim(s)

4

✓ 8#

Abstract

1

✓

Drawing(s)

4

✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

0

Translations of priority documents

0

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

0

Request for preliminary examination and search (Patents Form 9/77)

0

Request for substantive examination (Patents Form 10/77)

0

Any other documents (please specify)

0

11. I/We request the grant of a patent on the basis of this application.

Signature

GILLIAN COCKAYNE

Date 18.01.01

12. Name and daytime telephone number of person to contact in the United Kingdom

GILLIAN COCKAYNE 01245 275459

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

P/62007.GBA/VISD

1

Solid State Imager Arrangements

This invention relates to solid state imager arrangements and more particularly to arrangements in which signal charge multiplication is implemented.

In a typical charge coupled device (CCD) imager, signal charge representative of incident radiation is accumulated in an array of pixels over an image area. Following an integration period, signal charge is transferred to an output register by applying appropriate clocking or drive pulses to control electrodes. The signal charge is then read out from the output register and applied to a charge detection circuit to produce a voltage which is representative of the amount of signal charge.

Our previously published patent application, GB-A-2323471 discloses a CCD imager arrangement in which signal charge multiplication is obtained by providing a separate multiplication register following the output register. Charge is transferred through high field regions in elements of the multiplication register, thus accelerating the signal charge carriers and generating additional carriers through impact ionisation. As carrier multiplication occurs outside the conventional CCD structure itself, both the operation of the multiplication register and the CCD imager may be optimised without compromising the performance of one for the sake of the other.

The present invention seeks to provide an improved solid state imager arrangement.

According to the present invention, there is provided a solid state imager arrangement comprising: an image area, an output register which receives signal charge from the image

area, a separate multiplication register into which signal charge from the output register is transferred, means for obtaining signal charge multiplication by transferring the charge through a sufficiently high field in elements of the multiplication register, and an additional register into which excess signal charge is transferred.

The invention is particularly suitable for arrangements in which the solid state imager is a CCD imager but it may be applicable to other types of solid state device in which packets of signal charge are transferred into an output register.

The excess signal charge is that charge originating from the image area which does not pass entirely through the charge multiplication register. In the previously proposed arrangement, in parts of a scene of high illumination there is a risk that the well capacities in the multiplication register can be exceeded, leading to saturation and loss of image resolution. Thus, a drain region may be included which accepts charge exceeding a threshold value to avoid saturation.

The present inventor has realised that although the previously proposed structure offers good performance, it is possible to enhance it still further. The inclusion of an additional register to accept excess charge means that in circumstances where the well capacities of the multiplication register are likely to be exceeded, some of the signal charge originating from the image area is diverted away from the multiplication part of the arrangement. Instead, this excess signal charge is transferred to the additional register, which is a structure also capable of holding charge packets which may be controllably moved through the additional register. The remaining charge which passes through each multiplication

stage may then be recombined with the excess charge from the additional register. For example, the signal charge packet may be reconstituted by appropriate synchronised clocking of the two register outputs to give an output which comprises the excess charge plus the amplified remaining charge which passed through all stages of the multiplication register. The combining step is conveniently carried out before any further processing of the signal charge is carried out but it could be implemented at a later stage in the processing sequence, for example after charge has been converted at the charge detection circuit or following conversion into video output. It may not always be necessary to synchronise the multiplication and additional register readouts providing provision is made for combining charge packets originating from the same output register elements.

By using the invention, the dynamic range may be increased in comparison with the previous arrangement. In the previous arrangement, charge is lost to preserve image resolution at high illumination levels. With the present invention, the additional register acts as an overflow to store the excess signal charge which can then be usefully added back to the multiplied charge instead of being discarded. This gives the capability for the same imager arrangement to be used for both low light conditions and daylight conditions. It also permits dark and bright images in a scene to be detected simultaneously without loss of resolution in the high intensity regions.

The dynamic range capability of a CCD is often described by the ratio of the saturation signal to the read noise. In the previous device employing a multiplication register, the transfer curve is linear and saturation is determined by the charge handling capability of the output circuit or of the elements of the multiplication register. Since gain implemented

by the multiplication register may be 200 times or greater, the saturation signal may represent less than 1% of the well capacity of the pixel. By employing the invention, however, the whole range of pixel well capacity may be used, giving the consequent increase in dynamic range.

The transfer of excess signal charge into the additional register may be accomplished by passive means or by active means, such as a gate electrode structure to which control signals are applied.

There are several ways in which excess charge may be separated from the remaining charge which is transferred through each element of the multiplication register. In one embodiment, the signal charge from the output register is applied to the multiplication register. The charge is increased as it is clocked through the multiplication register and undergoes signal multiplication. The additional register is located adjacent the multiplication register, separated therefrom by a potential barrier. Excess charge from the multiplication register flows over the barrier and into a corresponding element of the additional register. The signal charge from the two registers may be detected on separate amplifiers or combined and detected on a single output as the sum of the two register outputs

If the multiplication register has a peak capacity N electrons and a gain of G , the response is linear up to N/G electrons and then logarithmic to N electrons. Thus, the dynamic range is effectively extended by a factor of approximately G .

The excess signal charge may be transferred to the additional register via one or more elements of the multiplication register as described above. In another embodiment, excess charge is separated from the remainder of the signal charge before the remainder is applied to the multiplication register. For example, signal charge may be detected or sampled either before application of the charge packet to the multiplication register or via one or more elements of the multiplication register. Subsequent transfer of the excess signal charge to the additional register may then be carried out depending on the magnitude of signal charge detected. For example, if it is determined that the signal charge in the first element of multiplication register would lead to saturation in the final element of the multiplication register, following amplification as the charge is transferred through the multiplication register, an amount of signal charge suitable to prevent saturation from occurring may be diverted as excess charge to the additional register. In another embodiment, a fixed percentage of the signal charge may always be diverted to the additional register as excess charge, but this may lead to some reduction in the amount of multiplication which could otherwise be achieved.

The excess signal charge may simply be that which exceeds a threshold level at some stage in the transfer of the signal charge through the multiplication register. The threshold level may be fixed or may be variable to take into account changes in the scene being viewed by the arrangement and/or ambient conditions.

The arrangement may be such that each element of the multiplication register corresponds to and is in communication with an element in the additional register, with transfer of excess charge being possible from each element in the multiplication register. In another

arrangement, such transfer may only be possible from certain of the elements of the multiplication register, for example from alternate elements or from elements towards the output end of the multiplication register.

In a preferred embodiment, the additional register is located physically close to the multiplication register so as to permit direct transfer of charge between the two via the intervening structure. However, they could be remotely located with respect to one another with charge being transferred via intervening circuitry and clocking techniques.

The invention is most applicable to an arrangement in which a single multiplication and a single additional register are included. However, in some embodiments, a multiplication register may be associated with a plurality of additional registers, which may be arranged in parallel or in a cascade arrangement. Also, a plurality of multiplication registers, each with its own additional register or registers, may be included in an arrangement to accept signal charge from a single output register. These architectures however are somewhat complicated and it is not apparent that the complexity would be off-set by improved performance.

Some ways in which the invention may be performed are now described by way of example with reference to the accompanying drawings, in which:

Figure 1 schematically shows a CCD imager arrangement in accordance with the invention; and

Figures 2 to 4 show other arrangements in accordance with the invention.

With reference to Figure 1, a CCD imager 1 includes an image area 2, a store section 3 and an output or readout register 4. The output register 4 is extended linearly to provide a multiplication register 5, the output of which is connected to a charge detection circuit 6. An additional register 7 having the same number of elements as the multiplication register 5 is located physically adjacent to the multiplication register 5, an implanted barrier region 8, shown schematically, being located between the two registers 5 and 7.

During operation of the device, incident radiation is converted at the image area 2 into signal charge representative of the intensity of radiation which impinges on the pixel array making up the image area 2. Following an integration period during which image acquisition occurs, drive pulses are applied to control electrodes 9 to transfer charge accumulated at the pixels of the image area 2 to the store section 3. Simultaneously, drive signals are also applied to control electrodes 10 at the store section 3 to cause charge to be transferred row by row towards the output register 4.

When a row of signal charge has been transferred to the output register 4, appropriate drive pulses are applied to electrodes 11 to sequentially transfer the signal charge from the elements of the output register 4 to those of the multiplication register 5, which is of similar architecture to the output register.

Multiplication of charge is implemented at each element of the multiplication register 5. High amplitude drive pulses, at the rate at which charge is clocked through the output

register 4, are applied to control electrodes 12 to both transfer signal charge from one element to the next adjacent element in the direction show by the arrow and also to increase the level of signal charge by an amount determined by the amplitude of the drive pulses. As each packet of charge is transferred through the multiplication register from one element to the next, the signal charge increases. The output of the multiplication register 5 is applied to the charge detector 6, this being a multiplied version of the signal charge collected in the output register 4. At each stage of the multiplication register 5, the signal charge is increased and each signal charge packet stored in the output register 4 undergoes identical multiplication process as each travels through all the elements of the multiplication register 5. In another embodiment, signal charge multiplication is dependent on the level of one or more dc potentials applied to the register.

The above description of the operation of the arrangement shown in Figure 1 is carried out when the signal charge collected at the image area 2 is relatively small and thus saturation does not occur during transfer through the multiplication register 5, the well capacity of the final element or elements of the register 5 being sufficient to accommodate the multiplied charge packets. However, in the event that the charge collected increases beyond the well capacity of the elements of the register 5, some of the charge is transferred from the elements of the multiplication register 5 via the implanted barrier into corresponding elements of the additional register 7. The amount of excess charge transferred to the additional register 7 is dependent on the barrier potential. In this embodiment, the barrier potential is fixed and is uniform along the length of the multiplication and additional registers 5 and 7. In other devices the potential is variable via control electrodes and/or is non-uniform. If the charge applied to the first element of the multiplication register 5 is

reasonably small, so that at the final element 5 the well capacity would only be exceeded by a relatively small amount, transfer via the barrier between the two registers only occurs between elements at the ends of the registers where the charge has undergone the most multiplication, for example, over the last two or three elements. Where a larger signal charge appears at the first element of the multiplication register 5, then transfer of the excess charge to the additional register 7 occurs over a greater length of the two registers, transfer being possible between each element of the multiplication register 5 and a corresponding element of the additional register 7. The two registers 5 and 7 are clocked in synchronism so that the charge appearing at the final element of the two registers originated with the same packet of signal charge from a common pixel of the image area 2. The outputs of the two registers are then combined at combiner 13 prior to being applied to the charge detector 6. In one embodiment, the registers are clocked in synchronism with line timing of a television signal.

The elements of the multiplication and/or additional registers may have the same charge capacity, or elements nearer the end or ends may have larger charge capacity.

In another embodiment, a control gate structure is disposed between the multiplication register 5 and additional register 7 to control the transfer of excess charge to the latter by applying suitable control pulses. A combination of the two approaches may be used.

Figure 2 illustrates another embodiment of the invention in which a processing circuit is located between the output register 4 and the multiplication register 5. A detector circuit 14 detects the amount of charge for an element from the output register 4 and causes a

fixed percentage of that charge to be diverted to the additional register 7. In other respects, the arrangement is similar to that shown in Figure 1. However, in this type of device, it is not necessary to arrange for the additional register 7 to be in physical proximity to the multiplication register 5 as there is no direct connection between the two for transfer of excess charge to the additional register 7.

In the devices of Figures 1 and 2, the charge from the multiplication register and that from the additional register is recombined prior to being applied to charge detector 6. In other arrangements, recombination is carried out at a later stage in the processing of the output signal. Also, it may be desirable in some applications to add a multiplication capability to the additional register 7 which performs in a similar way to that of the multiplication register 5.

With reference to Figure 3, in another embodiment similar to that shown in Figure 2, a threshold circuit 15 replaces the detector circuit 14 and acts on applied signal charge to divert charge exceeding a threshold level to the additional register 7. The threshold level can be fixed or variable. For example, it may be arranged to automatically track changes in ambient temperature or other parameters, or it could be controllably adjustable.

With reference to Figure 4, a device similar to that of Figure 1 also includes an implanted barrier 8 between a multiplication register 5 and additional register means for carrying excess charge. However the register means includes two additional registers 16 and 17 also having an implanted barrier 18 between them. Excess charge from additional register 16 is thus transferred to additional register 17, and outputs of the three registers is recombined at

combiner 19. This arrangement may be advantageous where signal charge multiplication is carried out in the first additional register 16 as well as in the multiplication register 5. In other architectures (not shown), several additional registers may be arranged in communication with a respective different set of the elements of the multiplication register.

CLAIMS

1. A solid state imager arrangement comprising: an image area, an output register which receives signal charge from the image area, a separate multiplication register into which signal charge from the output register is transferred, means for obtaining signal charge multiplication by transferring the charge through a sufficiently high field in elements of the multiplication register, and an additional register into which excess signal charge is transferred.
2. An arrangement as claimed in claim 1 wherein the excess signal charge that exceeding a threshold level.
3. An arrangement as claimed in claim 2 wherein the threshold level is variable.
4. An arrangement as claimed in claim 1 wherein the excess signal charge is a percentage of the signal charge received from the image area.
5. An arrangement as claimed in any preceding claim wherein excess signal charge is transferred to the additional register via one or more elements of the multiplication register.
6. An arrangement as claimed in claim 5 wherein excess signal charge is transferable from each element of the multiplication register to the additional register.

7. An arrangement as claimed in any of claims 1 to 4 wherein signal charge from the output register is applied to a separator which separates the excess signal charge from remaining signal charge, the excess charge being transferred to the additional register and the remaining signal charge to the multiplication register.
8. An arrangement as claimed in any preceding claim wherein the multiplication register and additional register have the same number of elements.
9. An arrangement as claimed in any preceding claim and wherein the amount of excess charge transferred to the additional register is determined by implanted barrier means.
10. An arrangement as claimed in claim 9 wherein the barrier means is located between the multiplication register and the additional register.
11. An arrangement as claimed in any preceding claim and including gate means for controlling the transfer of excess signal charge to the additional register.
12. An arrangement as claimed in any preceding claim and including means for combining signal charge after it has been transferred through the multiplication register with excess charge from the additional register.
13. An arrangement as claimed in any preceding claim wherein signal charge multiplication is obtained in the additional register.

14. An arrangement as claimed in any preceding claim and including a plurality of additional registers associated with the multiplication register.
15. An arrangement as claimed in any preceding claim wherein a sufficiently high field region is obtained in each element of the multiplication register.
16. An arrangement as claimed in any preceding claim and including means for synchronising signal readout from the multiplication register with line timing of a television rate signal.
17. An arrangement as claimed in any preceding claim wherein signal charge is clocked through the multiplication register and excess charge through the additional register at the same rate as charge is clocked through the output register.
18. An arrangement as claimed in any preceding claim wherein the amount of signal charge multiplication is controlled by controlling the amplitude of one or more drive pulses applied to a register to transfer signal charge therethrough.
19. An arrangement as claimed in any preceding claim wherein the amount of signal charge multiplication is controlled by controlling the level of one or more dc potentials applied to a register.

20. An arrangement as claimed in any preceding claim wherein the charge capacity of at least some of the elements of the multiplication register is larger than that of elements of the output register.
21. An arrangement as claimed in any preceding claim and including a plurality of multiplication registers arranged to receive signal charge from the output register, at least one of the plurality having associated therewith an additional register.
22. An arrangement as claimed in any preceding claim wherein the solid imager is a CCD imager.
23. An arrangement substantially as described with reference to and illustrated in the accompanying drawings.

ABSTRACT

Solid State Imager Arrangements

In a CCD imager, charge representative of incident radiation is clocked from an image area 2 via a store section 3 to an output register 4. The signal charge is clocked from the output register 4 to a multiplication register 5 to give charge multiplication. Excess charge developed at the multiplication register 5 is transferred into an additional register 7 which is clocked in synchronism with the multiplication register 5. The outputs of the registers are combined at 13 and applied to a charge detector 6. The provision of the additional register 7 increases the dynamic range capability of the CCD imager.

(Figure 1)

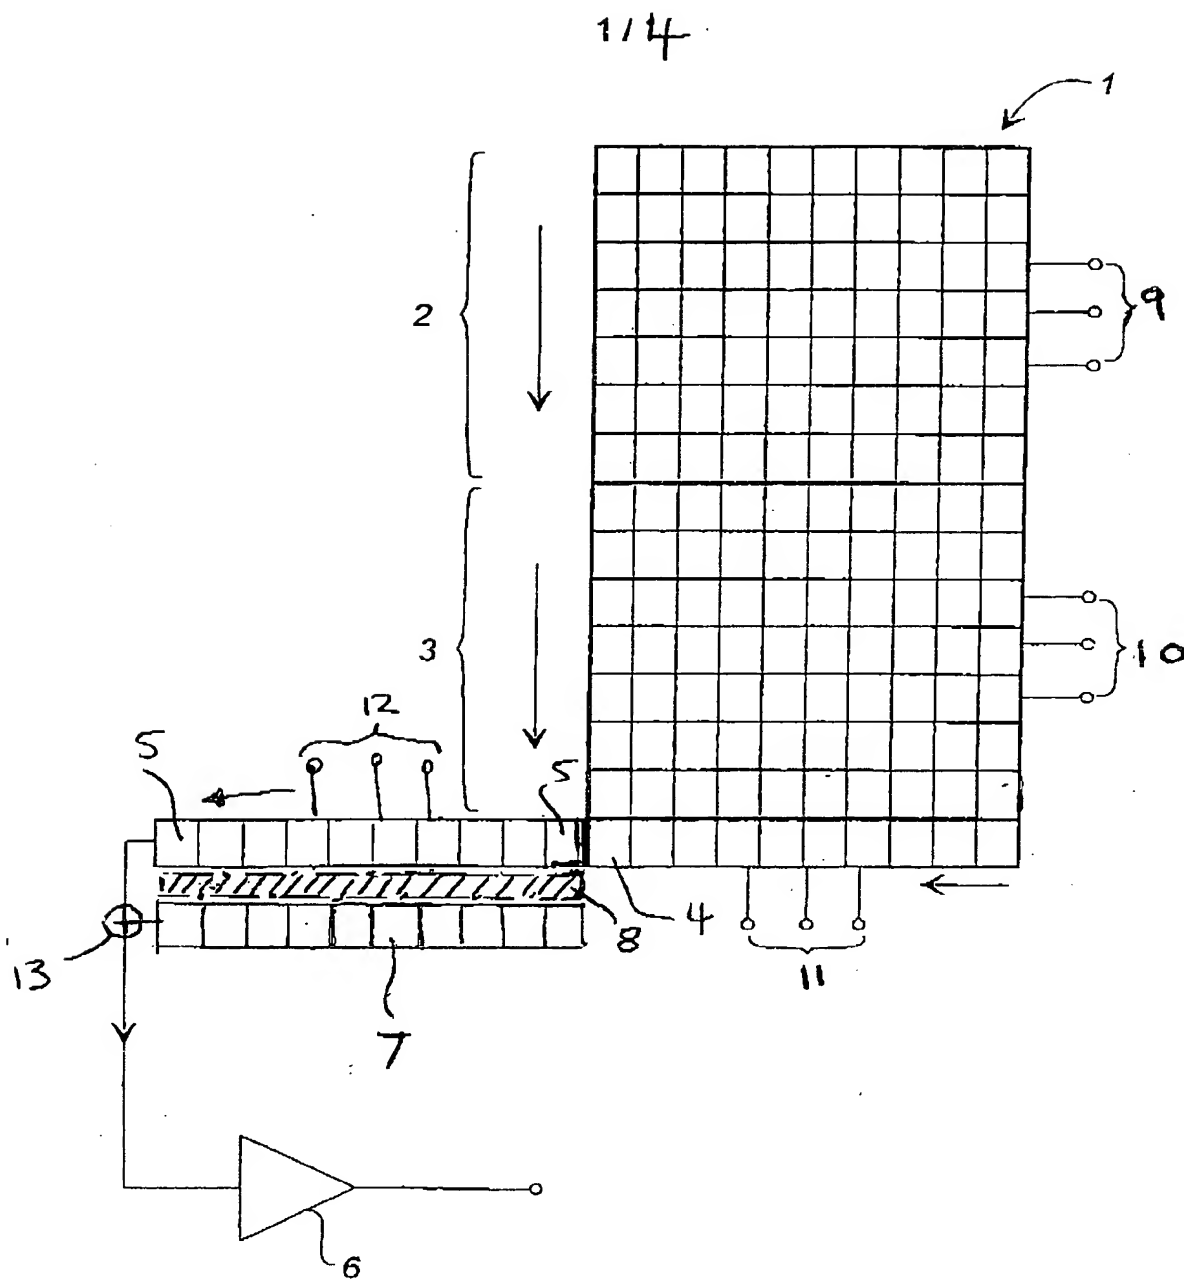


Fig. 1



2/4

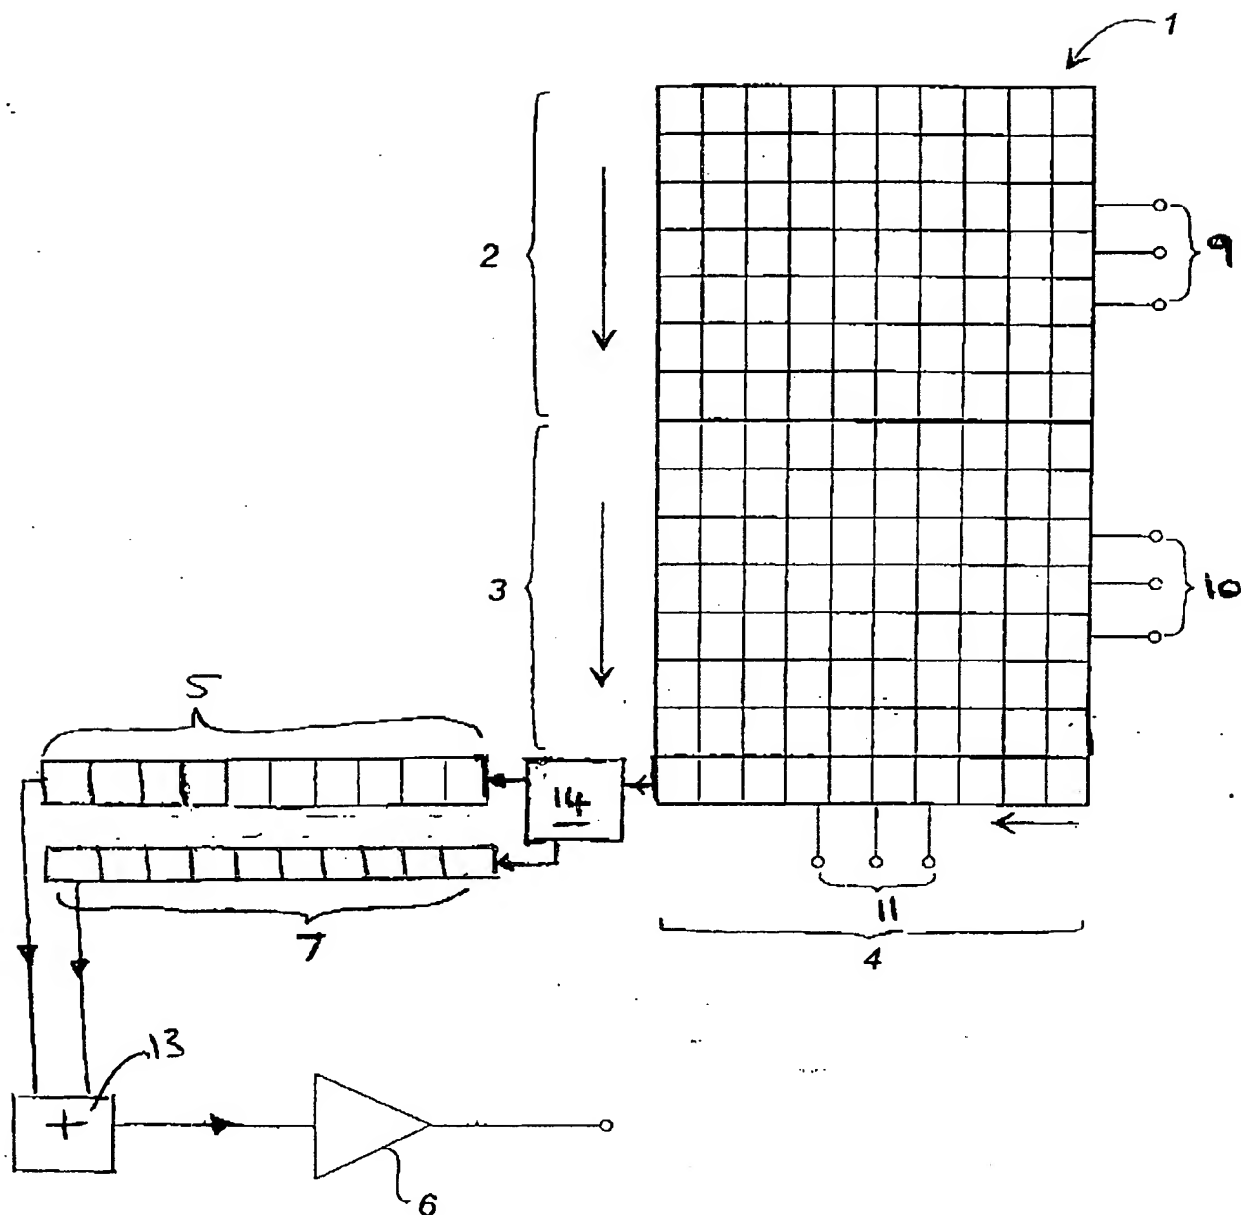


Fig. 2



3/4

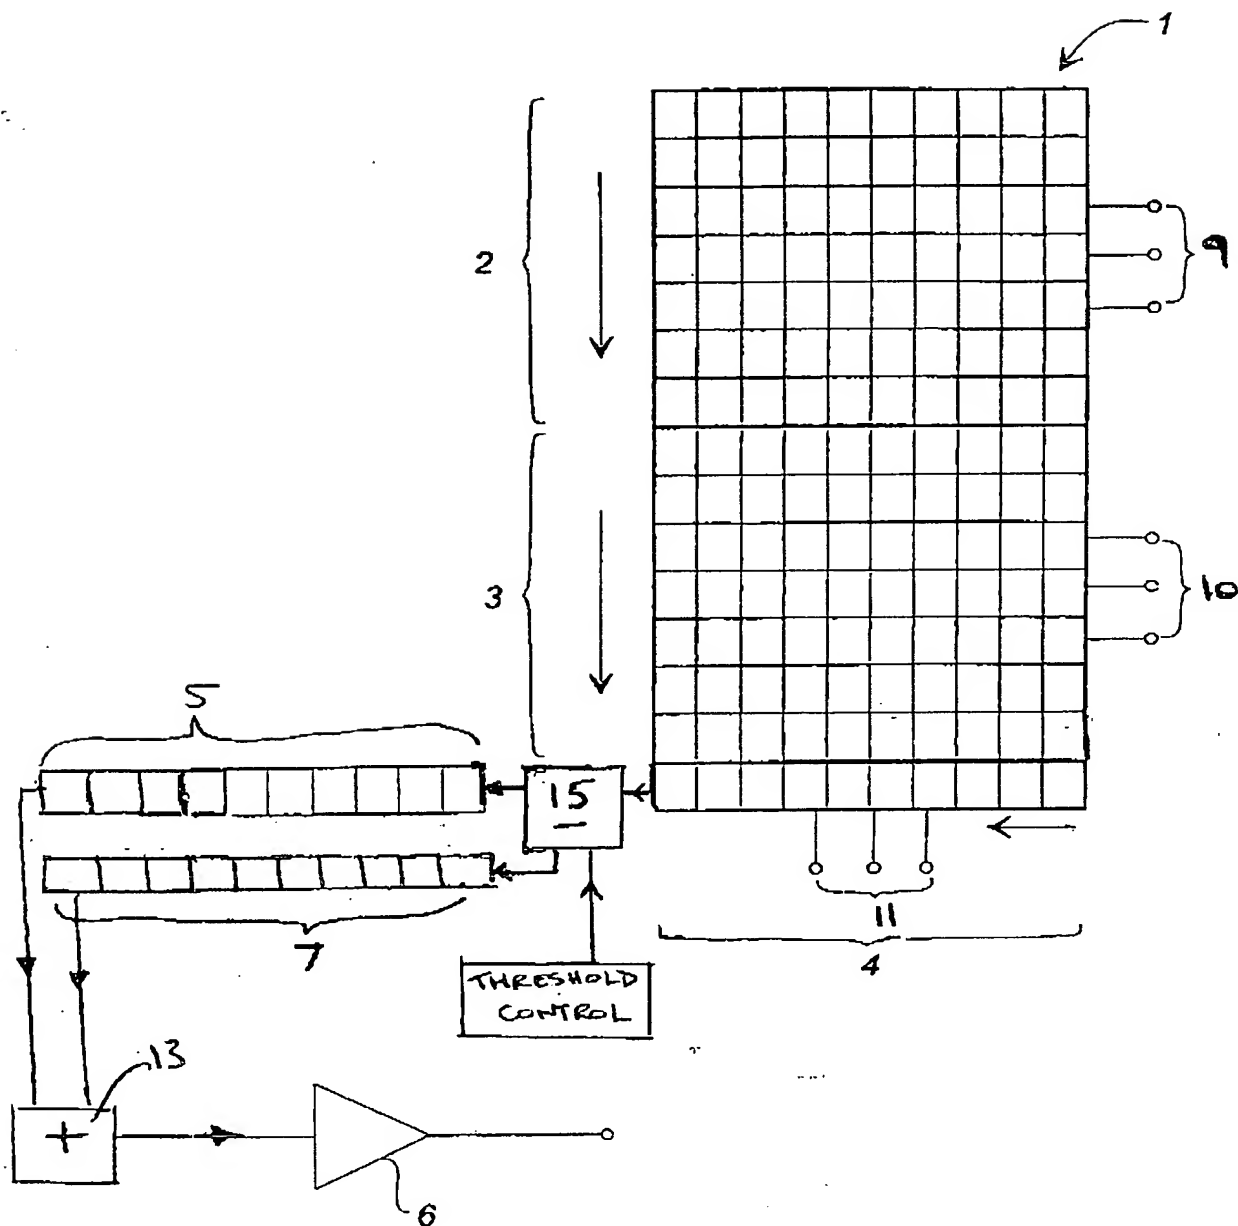


Fig 3



4/4

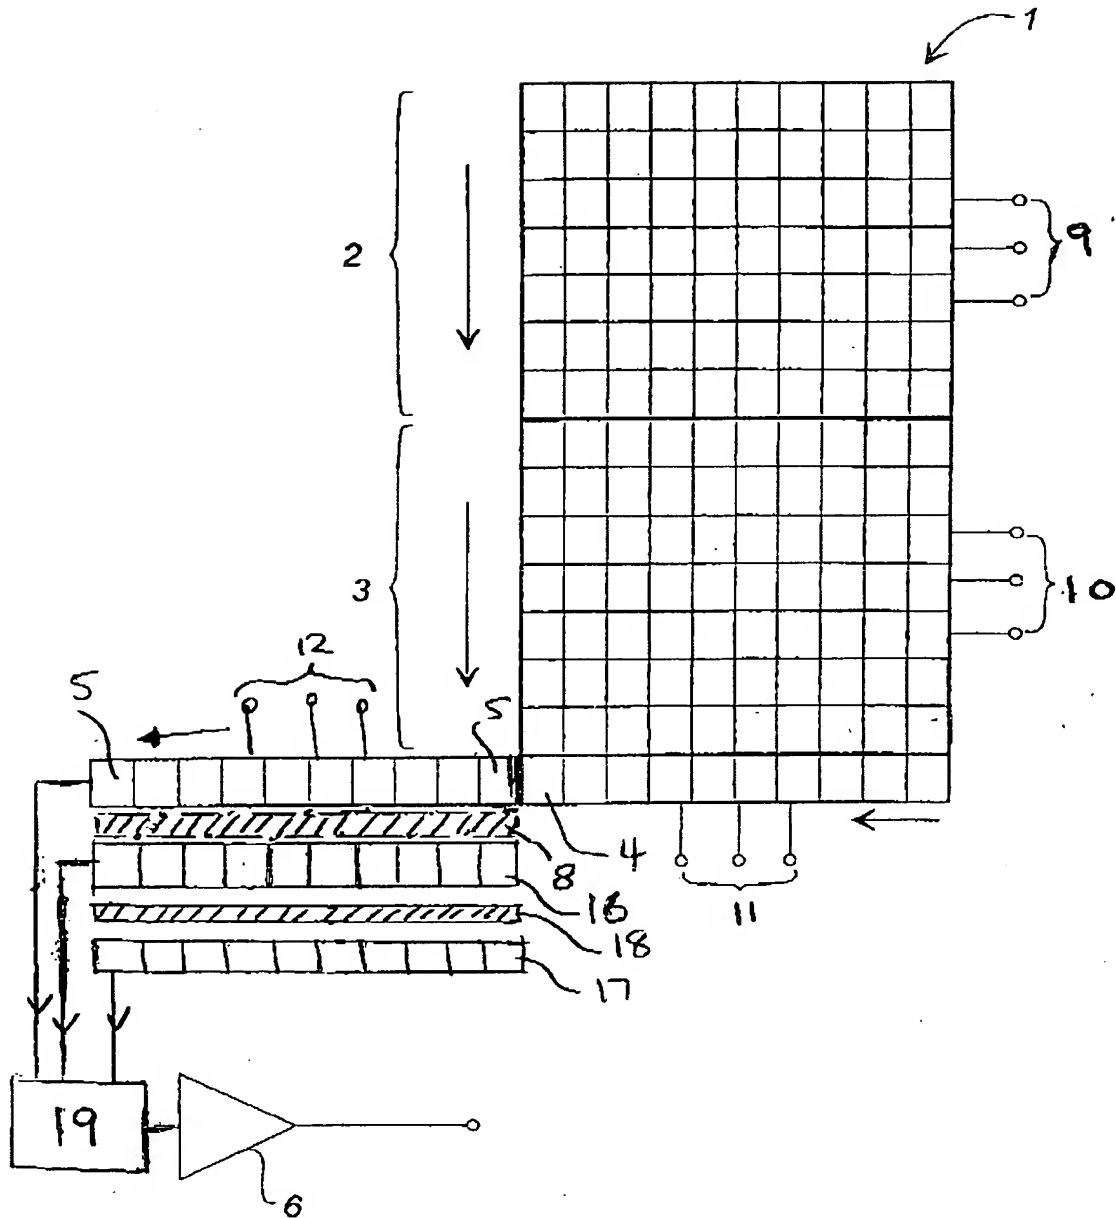


Fig. 4

THIS PAGE BLANK (USPTO)